



## VS3100 Desktop Wireless Paging Controller



Solutions for:

- *Medical Centers*
- *Assisted Living Facilities*
- *Hotels*
- *Office Buildings*
- *Military Facilities*
- *Security Applications*
- *Financial Institutions*
- *Manufacturing Plants*

The Visiplex VS3100 is the world's most advanced desktop paging system. Equipped with a full size keyboard for easy operation and programming, the VS3100 can accommodate up to 1000 pagers. Pages can be initiated through the keyboard, telephone, portable radio, RS232 serial port (i.e. Nurse Call, HVAC, Fire & Security Systems, etc.), network clients, dial up alphanumeric input devices and alarm inputs.

The VS3100 comes standard with one RS232 serial port, 24 dry contact alarm points and power supply. Options include telephone interface (up to 2), multiple RS232 serial ports (up to 4), additional alarm points (up to 1000), reports package with printer interface, 2-way radio package, a choice of 2-8 watt internal transmitters and 8-350 watt external transmitters.

### FEATURES:

- 1000 pager capacity
- Alphanumeric and Voice paging capability
- Individual and group call capability
- Integrated LCD display and Keyboard
- User programmable messages

### OPTIONS:

- Low or high power transmitters
- Windows based programming software
- Inputs expansion modules (up to 1000)
- Voice response messaging notification
- Printed reports package
- Internal telephone interface
- Internal modem interface

### BENEFITS:

- Low cost alphanumeric paging solution
- Allows personnel to stay informed 100% of the time regardless of location
- Notifies staff immediately of an event via silent, full text alphanumeric pagers
- Provides time and date stamped activity reports for all system events

**Alarm Inputs:** Built-in 24 dry-contact alarm inputs with pre-programmed messages that can be initiated from the unit keypad or over the phone.

**Database:** 1000 device database and groups.

**RF Transmitter:** Internal 8W transmitter or external transmitter of up to 350W for complete RF coverage of large facilities.

**Software:** PC Windows based software package that is designed to program, control and backup the unit database.


**Telephone:** Built-in PABX telephone interface for remote paging activation.

**Display:** Graphic DSTN LCD Display with 8 lines/40 characters and backlit.

**Interface:** RS-232 port for PC programming, an optional handheld microphone and network interface.

**Power:** Operates from a 12VDC 3A, AC or car power adaptor.

**Dimensions:** 13.5" wide x 3.1" high x 9.5" deep, desk mount.

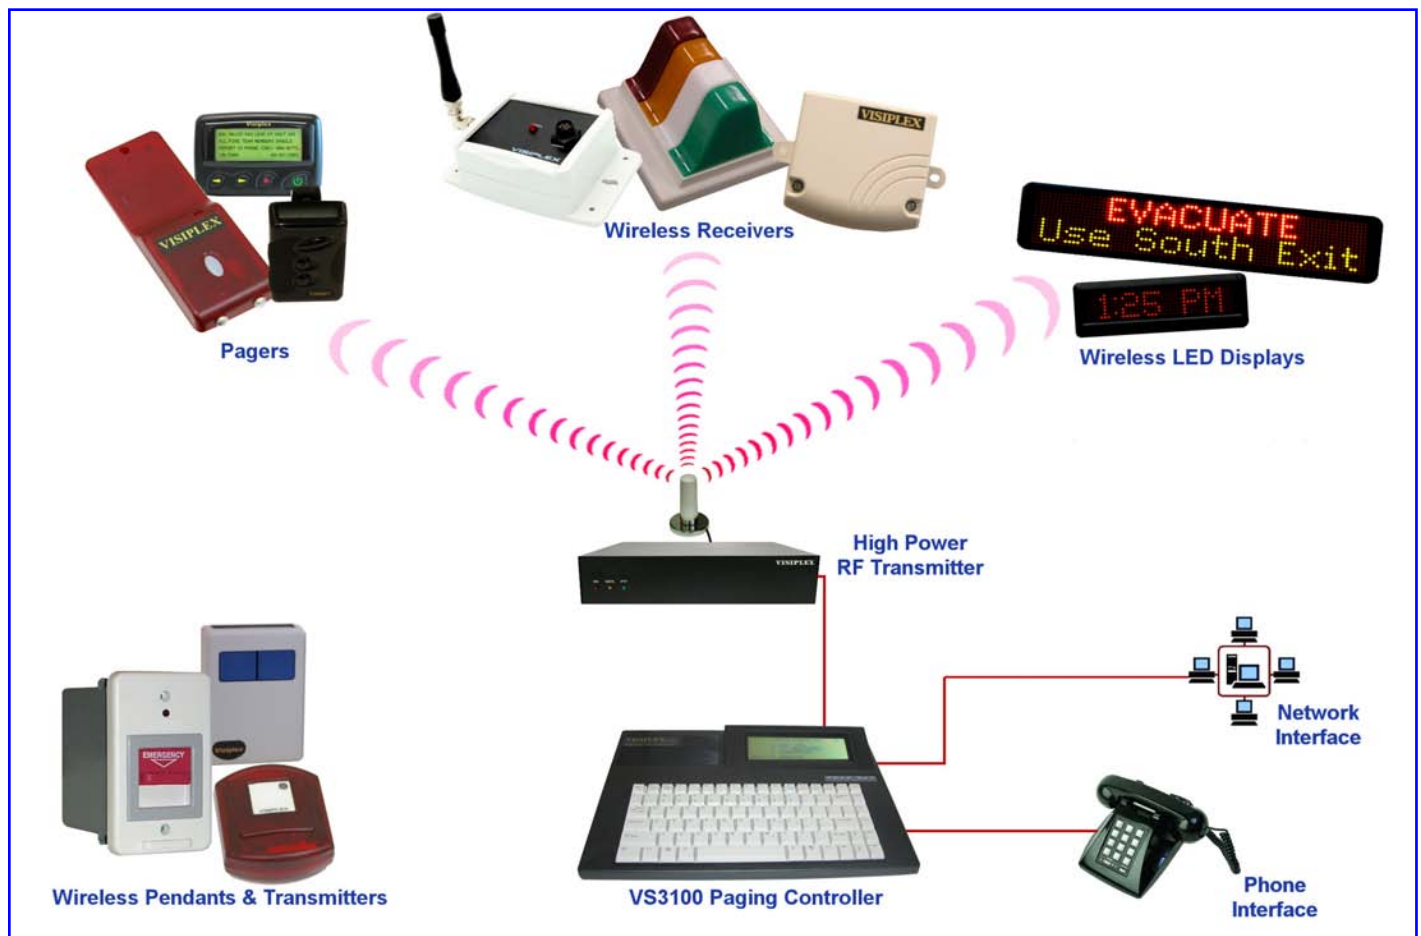

PageLink - VS3100 Wireless Paging System